



Australian Government

Department of Industry,
Science and Resources

**National
Measurement
Institute**

36 Bradfield Road, West Lindfield NSW 2070

Certificate of Approval
NMI 14/2/110

Issued by the Chief Metrologist under Regulation 60
of the
National Measurement Regulations 1999

This is to certify that an approval for use for trade has been granted in respect of the instruments herein described.

Landis & Gyr model E355 Type S1310 Electricity Meter

submitted by Landis & Gyr Pty Ltd
Tower B, Level 3
201 Coward Street
Mascot NSW 2020

NOTE: This Certificate relates to the suitability of the pattern of the instrument for use for trade only in respect of its metrological characteristics. This Certificate does not constitute or imply any guarantee of compliance by the manufacturer or any other person with any requirements regarding safety.

This approval has been granted with reference to the document NMI M 6-1 *Electricity Meters. Part 1: Metrological and Technical Requirements*, June 2022.

This approval is subject to review at the decision of the Chief Metrologist in accordance with the conditions specified in the document NMI P 106.

DOCUMENT HISTORY

Rev	Reason/Details	Date
0	Pattern and variants 1 & 2 approved – certificate issued	18/08/21
1	Variants 3 & 4 approved, certificate updated – certificate issued	18/11/25
2	Submittor's address updated, title of pattern amended – certificate issued.	28/11/25
3	Variants 5 & 6 approved – certificate issued	25/06/26


CONDITIONS OF APPROVAL

General

Instruments purporting to comply with this approval shall be marked with pattern approval number 'NMI 14/2/110' and only by persons authorised by the submitter.

It is the submitter's responsibility to ensure that all instruments marked with this approval number are constructed as described in the documentation lodged with the National Measurement Institute (NMI) and with the relevant Certificate of Approval and Technical Schedule. Failure to comply with this Condition may attract penalties under Section 19B of the National Measurement Act and may result in cancellation or withdrawal of the approval, in accordance with document NMI P 106.

Signed by a person authorised by the Chief Metrologist
to exercise their powers under Regulation 60 of the
National Measurement Regulations 1999.

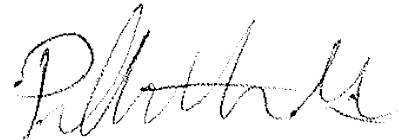A handwritten signature in black ink, appearing to read 'Phillip Mitchell', is positioned above the printed name and title.

Phillip Mitchell
A/g Manager
Policy and Regulatory Services

TECHNICAL SCHEDULE No 14/2/110

1. Description of Pattern

approved on 18/08/21

A Landis & Gyr model E355 Type S1310 (*) single phase Class 1 direct connected static watt hour meter (Figure 1) used to measure electrical energy.

(* - the type designation is specified in the Cat. No. and may include additional alphanumeric characters.)

1.1 Field of Operation

The field of operation of the measuring system is determined by the following characteristics:

- Number of phases 1
- Number of wires 2
- Reference frequency 50 Hz
- Reference ambient temperature ranges:
 - specified range of operation -10 to 60 °C
 - limit range of operation -25 to 70 °C
- Rated voltage 230 V AC or 240 V AC
- Rated currents:
 - Basic current, I_b 10 A
 - Maximum current, I_{max} 100 A
- Meter constant 1000 imp/kWh
- Accuracy class 1

1.2 Features/Functions

- One element
- Liquid crystal digital indicator
- Internal crystal and synchronous clock
- Measurement in both positive and negative directions (export and import)

1.3 Verification Provision

Provision is made for the application of a verification mark.

1.4 Sealing Provision

Provision is made for the sealing devices and parameters that have a metrologically significant effect and that determine the measurement result by the application of mechanical seals (Figure1) and solid state sealing.

1.5 Descriptive Markings

Instruments are clearly and permanently marked with the following data, in the vicinity of the indicating device, in the form shown at right:

Manufacturer's name or mark	
Model designation	...
Serial number	...
Pattern approval mark	NMI 14/2/110
Number of phases	...
Number of wires	...
Reference frequency	... Hz
Meter constant	...
Rated voltage	... AC
Rated currents:	I_b ... A
	I_{max} ... A
Accuracy class	...

1.6 Harmonics

Instruments purporting to comply with this approval are suitable for use where the harmonics do not exceed those specified in pathway 1 of NMI M 6-1:2022.

2. Description of Variant 1 approved on 18/08/21

A Landis & Gyr model E360 (Series 1) Type S1310 single phase Class 1 direct connected static watt hour meter (Figure 2) used to measure electrical energy.

This variant has the same Field of Operations and Features/Functions as the pattern.

3. Description of Variant 2 approved on 18/08/21

Type S1325 meters (Figure 3) with same Field of Operation and Features/Functions as the pattern and variant 1, except as listed below:

- Two elements
- 40 A Relay with LT terminal

4. Description of Variant 3 approved on 18/11/25

Type S1310 (series 2) meters (Figure 4) with the same Field of Operation and Features/Functions as the pattern and variant 1, except for Optimisation of the AC/DC Power Supply and integration of the previously separate power supply board into the main circuit board. This variant is distinguished by a catalogue number starting with 'S1310D2' or 'S1310D3'.

5. Description of Variant 4**approved on 18/11/25**

Type S1325 (series 2) meters (Figure 5) with the same Field of Operation and Features/Functions as variant 2, except for Optimisation of the AC/DC Power Supply and integration of the previously separate power supply board into the main circuit board. This variant is distinguished by a catalogue number starting with 'S1325D2' or 'S1325D3'.

6. Description of Variant 5**approved on 25/06/26**

A Landis & Gyr model E355 Type S1326 (Figure 6) with the same Field of Operations and Features/Functions as variant 4, except as listed below:

- 63 A LCS relay on L1 terminal
- Specified range of operation –10 to +55 °C

7. Description of Variant 6**approved on 25/06/26**

A Landis & Gyr model E360 Type S1326 (Figure 7) with the same Field of Operations and Features/Functions as variant 4, except as listed below:

- 63 A LCS relay on L1 terminal
- Specified range of operation –10 to +55 °C

TEST PROCEDURE

Instruments tested for verification shall comply with the certificate of approval and technical schedule, and the maximum permissible errors for verifications at the operating conditions in effect at the time of verification.

The maximum permissible errors are specified in the *National Trade Measurement Regulations 2009* (Cth).

Electricity meters shall be verified in accordance with the following National Instrument Test Procedures:

- NITP 14.0 – Utility Meters – general requirements
- NITP 14.2 – Utility Meters – electricity meters

NOTE: NMI reserves the right to vary this procedure. Any such variation shall be notified in writing by NMI.

FIGURE 14/2/110 – 1




Landis+Gyr model E355 Type S1310 Electricity Meter (Including Typical Mechanical Sealing)

FIGURE 14/2/110 – 2



Landis+Gyr model E360 (Series 1) Type S1310 Electricity Meter
(Variant 1)

FIGURE 14/2/110 – 3

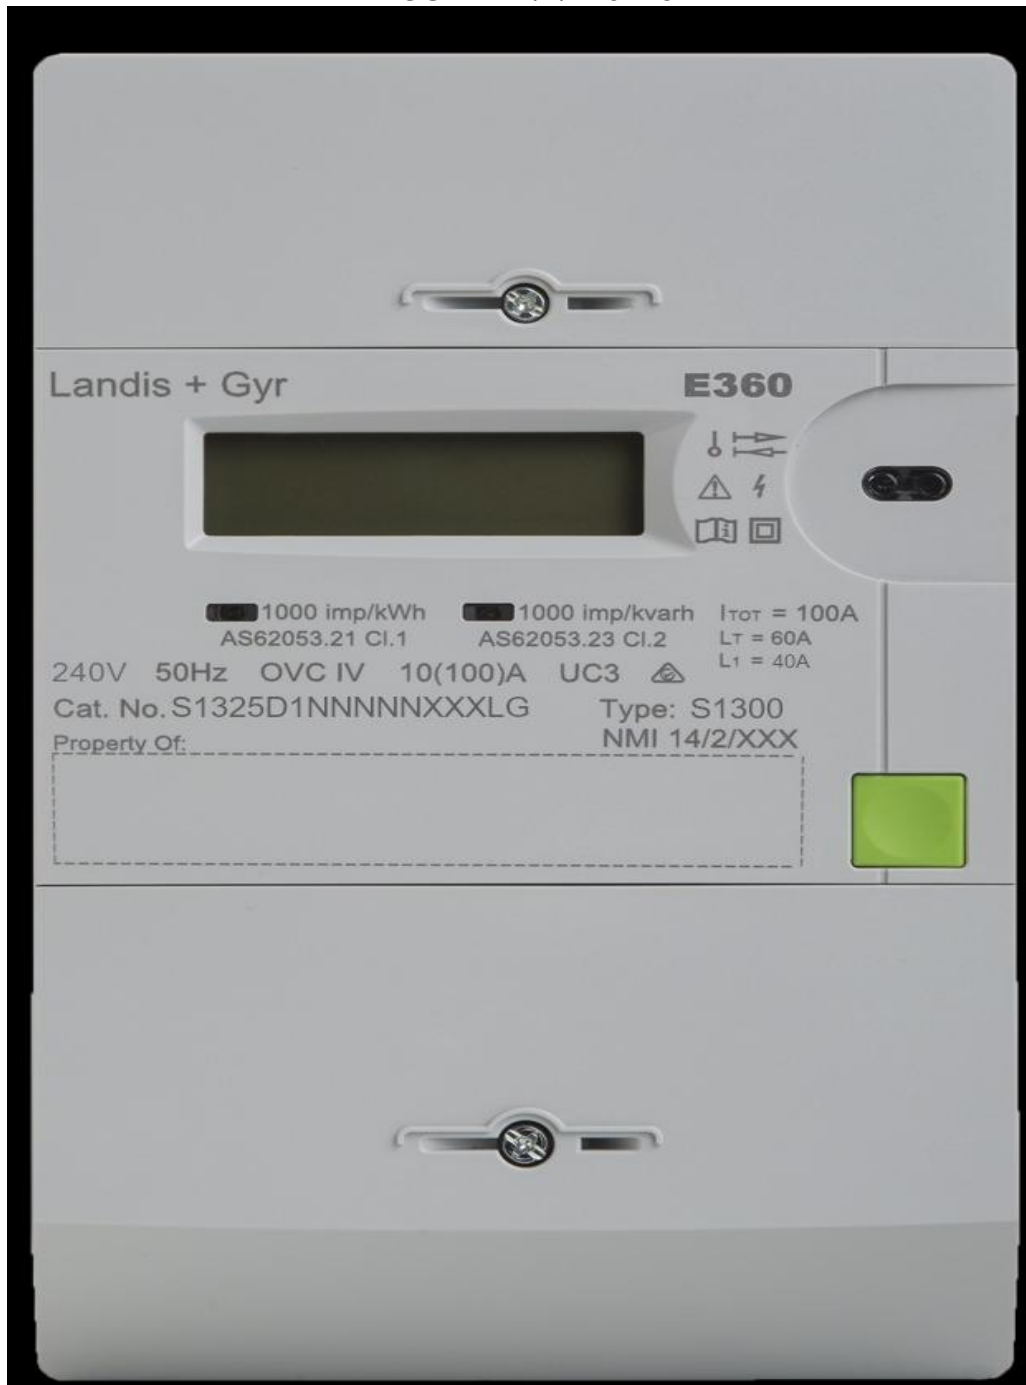

Landis+Gyr model E360 Type S1325 Electricity Meter (Variant 2)

FIGURE 14/2/110 – 4




Landis+Gyr Type S1310 (Series 2) Electricity Meter (Variant 3)

FIGURE 14/2/110 – 5



Landis+Gyr Type S1325 (Series 2) Electricity Meter (Variant 4)

FIGURE 14/2/110 – 6

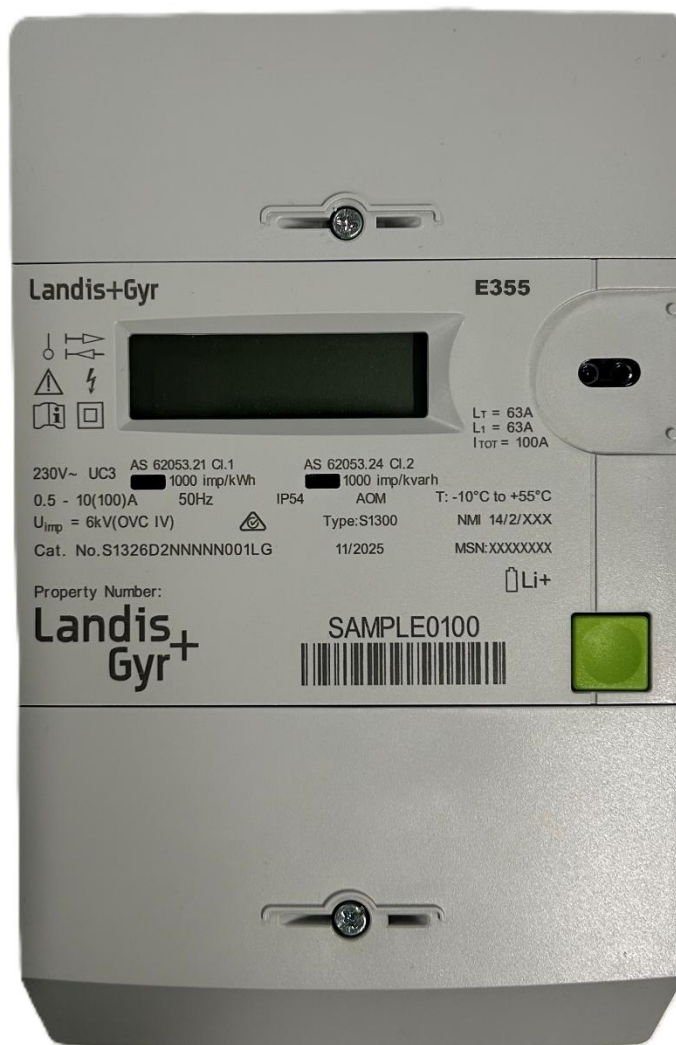

Landis+Gyr model E355 Type S1326 Electricity Meter (Variant 5)

FIGURE 14/2/110 – 7



Landis+Gyr model E360 Type S1326 Electricity Meter (Variant 6)