



Australian Government

National Measurement  
Institute

Bradfield Road, West Lindfield NSW 2070

# Supplementary Certificate of Approval

## No S604

Issued by the Chief Metrologist under Regulation 60  
of the  
National Measurement Regulations 1999

This is to certify that an approval for use for trade has been granted in respect of the instruments herein described.

Casio Model QT6600 Point of Sale (POS) System

submitted by Shriro Australia Pty Ltd  
104 Vanessa Street  
Kingsgrove NSW 2208

**NOTE:** This Certificate relates to the suitability of the pattern of the instrument for use for trade only in respect of its metrological characteristics. This Certificate does not constitute or imply any guarantee of compliance by the manufacturer or any other person with any requirements regarding safety.

This approval has been granted with reference to document NMI M7, *Pattern Approval Specifications for Point of Sale Systems*, dated June 2012.

This approval becomes subject to review on 1/11/17, and then every 5 years thereafter.

### DOCUMENT HISTORY

Rev	Reason/Details	Date
0	Pattern provisionally approved – interim certificate issued	26/10/12
1	Pattern amended (validity date) – interim certificate issued	17/01/13
2	Pattern amended (validity date) – interim certificate issued	24/04/13
3	Pattern approved – certificate issued	14/06/13
4	Pattern amended (incl. customer display) – certificate issued	21/02/14

### CONDITIONS OF APPROVAL

#### General

Instruments purporting to comply with this approval shall be marked with pattern approval number 'NMI S604' and only by persons authorised by the submitter.

Instruments purporting to comply with this approval and currently marked 'NMI PS604' may be re-marked 'NMI S604' but only by persons authorised by the submitter.

It is the submitter's responsibility to ensure that all instruments marked with this approval number are constructed as described in the documentation lodged with the National Measurement Institute (NMI) and with the relevant Certificate of Approval and Technical Schedule. Failure to comply with this Condition may attract penalties under Section 19B of the National Measurement Act and may result in cancellation or withdrawal of the approval, in accordance with document NMI P 106.

### **Special**

Certain aspects of this instrument (in particular transaction record printing formats) are able to be configured by the user. Whilst NMI believes that acceptable formats can be achieved for typical basic sales modes, it is also possible for the instrument to be configured to produce unacceptable formats, and use of some formats may be inappropriate for different sales modes. It is the responsibility of the user to ensure that acceptable and appropriate formats are used in any particular situation.

Signed by a person authorised by the Chief Metrologist to exercise their powers under Regulation 60 of the *National Measurement Regulations 1999*.

A handwritten signature in black ink, appearing to read 'A Rawlinson', with a horizontal line underneath.

Dr A Rawlinson

## TECHNICAL SCHEDULE No S604

### 1. Description of Pattern **provisionally approved on 26/10/12** **approved on 14/06/13**

A Casio model QT6600 system to provide certain additional facilities for transactions when interfaced to compatible (#) NMI-approved point of sale systems granted with reference to document NMI M7.

#### 1.1 Key Features

- The system provides point of sale arrangements for a Teraoka model Digi DS-772 self-indicating non-automatic weighing instrument (approval NMI 6/4C/240) or other compatible (#) NMI-approved measuring instruments.
  - The system receives measurement data from the output interface of the approved measuring instrument and computes prices using a product look up (PLU) facility.
  - The system computes total price for multiple items including non-measured items and is approved for use for transactions direct to the public.
  - Manually entered measurement data shall be indicated as such on a printed transaction record.
  - The system is able to apply a preset tare value up to the maximum capacity of the approved measuring instrument. Preset tare values may be keyboard-entered or stored (e.g. within a PLU facility).
  - The POS controllers may be connected in a network to share common PLU data, for totalisation, and to accumulate and retrieve management information.
- (#) 'Compatible' is defined to mean that no additions/changes to the hardware/software specified in this approval are required for satisfactory operation of the system.

#### 1.2 System Description

The Casio model QT6600 point of sale (POS) (Figure 1) comprises:

##### (i) POS Controller

The POS controller comprises a Casio model QT6600 cash register that operates a Casio proprietary operating system running 'AU new scale control' Device Driver legally relevant version v1.00 software. The software version number is printed by the receipt printer when the system is 'flag cleared' (Figure 2). (Non-legally relevant component/s of the software may also appear on this printout.)

##### (ii) Electronic Indications

Indications shall satisfy the requirements of document NMI M7, *Pattern Approval Specifications for Point of Sale Systems*.

The Casio model QT6600 has a resistive touch sensitive display or equivalent (\*) to provide an indication for the operator (Figure 3).

- (\*) 'Equivalent' is defined to mean other proprietary equipment of the same or better specifications requiring no changes to the software specified in this approval for satisfactory operation of the system.

The integral 2 line display does NOT comply with the requirements of document NMI M7, so a Tysso model DSP-830 or DSP430 remote 2 line display or equivalent (\*) is connected to provide an indication for the customer (Figure 4). Alternatively the internal display must be disabled and no customer display will be included.

### **(iii) Printing Devices**

Transaction records shall satisfy the requirements of document NMI M7, *Pattern Approval Specifications for Point of Sale Systems*.

A Casio model MP400 printer or equivalent (\*) is connected to the controller to provide transaction record printing facility. A typical record is shown in Figure 5.

### **(iv) Additional System Facilities**

In addition, the system may include other facilities including point of sale cash drawers, magnetic card and/or barcode reader and electronic funds transfer (EFT). The facilities shall not interact with the system in a way that would cause an incorrect indication of the measured quantity or price.

## **1.3 Verification Provision**

Provision is made for the application of a verification mark.

## **1.4 Descriptive Markings**

The POS controller is marked in a clear and permanent manner, in one location, with the following information:

Submittor's name or mark	.....
Serial number or other unique identifier	.....
Pattern approval number	NMI S604

## **1.5 Family of Devices**

The models QT6000 and QT6100 cash registers which are similar to the pattern, in various configurations of the features outlined in clause **1.2 (iv) Additional System Facilities**.

There is no integral customer display fitted to these model cash registers.

A Tysso model DSP-830 or DSP430 remote 2 line display or equivalent (\*) may be connected to provide an indication for the customer (Figure 4).

(\*) 'Equivalent' is defined to mean other proprietary equipment of the same or better specifications requiring no changes to the software specified in this approval for satisfactory operation of the system.

## TEST PROCEDURE No S604

The POS system shall be tested in addition to any tests specified in the approval documentation for the measuring instrument/s to which the POS system is connected, as appropriate

The POS system shall be tested in the normal operational mode of the instrument and device, not in 'training mode' or any other management mode.


### **Maximum Permissible Error**

The maximum permissible error for price computation is  $\pm 0.5$  cent.

### TESTS

1. Check the software version number/s.
2. Check that the POS system faithfully reproduces the measurement data in the same units and scale interval as the connected approved measuring instrument, e.g. test by using a PLU without a stored tare.
3. Check that the system performs correct price computation, and computes and indicates a correct unrounded subtotal. For cash payment methods, check that any rounding calculation is correct.
4. Perform a measurement with a preset tare applied and confirm that the POS system correctly calculates and indicates a net measurement result.
5. Manually enter some pre-determined measurement data and ensure that the printed transaction record clearly indicates the transaction as such.
6. For network systems check to ensure that the measurement data printed on the transaction record is correctly reproduced.
7. Ensure that electronic indications and printed information are in accordance with document NMI M7.

FIGURE S604 – 1

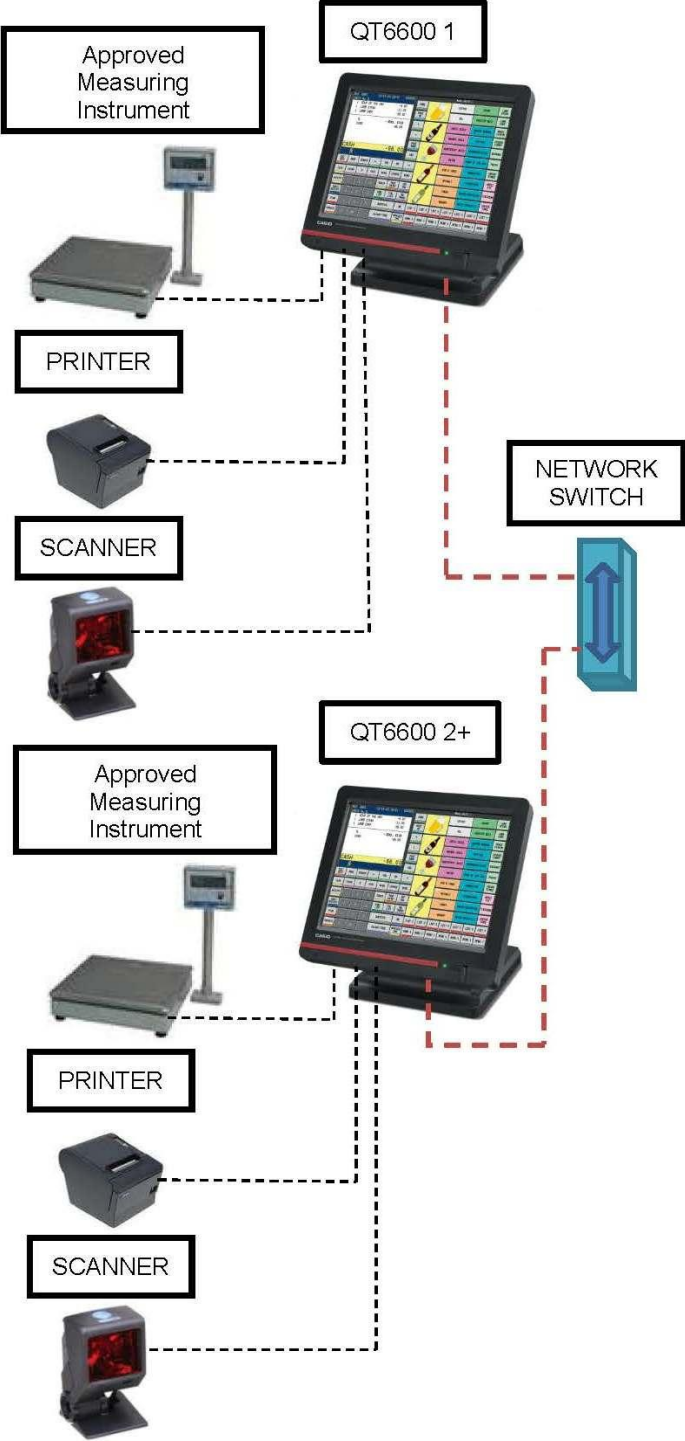

Serial Data Connection    - - - - -

Ethernet Data Connection    - - - - -

Casio Model QT6600 Point of Sale (POS) System

FIGURE S604 – 2



Printout Showing Software Version

FIGURE S604 – 3



Typical Operator Display

FIGURE S604 – 4



Typical Remote Customer Displays

FIGURE S604 – 5



A Typical Receipt