




REFERENCE MATERIAL PRODUCT INFORMATION SHEET

NMIA D1065: Formoterol fumarate

Report ID: D1065.2019.01

Chemical Formula: $(C_{19}H_{24}N_2O_4)_2 \cdot C_4H_4O_4$

Molecular Weight: 804.9 (salt), 344.4 (free base) g/mol

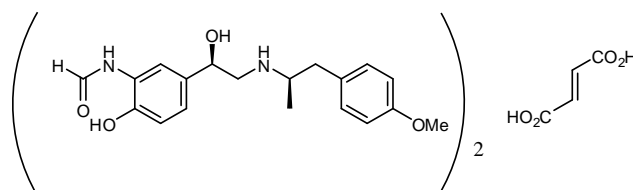

Certified value

Batch No.	CAS No.	Purity (mass fraction)
16-D-04	43229-80-7	95.2 ± 2.0%

The uncertainty has been calculated according to ISO Guide 35 and is stated at the 95% confidence limit ($k = 2$).

Synonyms: (R^*, R^*) -(±)-*N*-[2-hydroxy-5-[1-hydroxy-2-[[2-(4-methoxyphenyl)-1-methylethyl]amino]ethyl]phenyl]-formamide (E)-2-butenedioate (2:1), Aformoterol, Eformoterol fumarate .

Expiration of certification: The property values are valid till 4 March 2022, i.e. three years from the date of re-certification provided the **unopened** material is handled and stored in accordance with the recommendations below. The material as issued in the unopened container and stored as recommended below should be suitable for use beyond this date, subject to confirmation of batch stability from the issuing body. The expiry date/shelf life does not apply to sample bottles that have been opened. In such cases it is recommended that the end-user conduct their own in-house stability trials. The material will be re-tested on an annual basis to ensure that the property values are still valid. In the event a product fails the stability trial, notification will be sent to all impacted customers.

Description: Off-white solid sourced from an external supplier, and certified for identity and purity by NMIA. Packaged in amber glass bottles with a septum and crimped aluminium cap or screw top cap.

Intended use: This reference material should be used for qualitative analysis only.

Instructions for use: Equilibrate the bottled material to room temperature before opening.

Recommended storage: When not in use this material should be stored at or below 4 °C in a closed container in a dry, dark area.

Stability: In the absence of long term stability data the measurement uncertainty at the 95% coverage interval has been expanded to accommodate any potential change in the property value. The stability component has been estimated from stability trials conducted on similar materials by NMI Australia over the last 10 years. The long-term stability of the compound in solution has not been examined.

Homogeneity assessment: The homogeneity of the material was assessed using purity assay by HPLC with UV detection on ten randomly selected 1-2 mg sub samples of the material. The material was judged to be sufficiently homogeneous at this level of sampling as the variation in analysis results between samples was not significantly different at a 95% confidence level from that observed on repeat analysis of the same sample.

Safety: Treat as a hazardous substance. Use appropriate work practices when handling to avoid skin or eye contact, ingestion or inhalation of dust. Refer to the provided safety data sheet.

S. R. Davies

Dr Stephen R. Davies,
Team Leader,
Chemical Reference Materials, NMI.
15 March 2019

This report supersedes any issued prior to 15 March 2019.

NATA logo notice: Accredited for compliance with ISO 17034. Accreditation No. 198 / Corporate Site No. 20844. The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.

Legal notice: Terms and Conditions associated with the provision of this reference material can be found on the NMIA website.

Characterisation Report:

The identity was confirmed by a range of spectroscopic techniques, NMR, IR and MS. The purity value was obtained from a combination of traditional analytical techniques and quantitative nuclear magnetic resonance (qNMR). The techniques used in the mass balance approach include HPLC with UV detection thermogravimetric analysis, Karl Fischer analysis and ¹H NMR spectroscopy. The purity value is calculated as per Equation 1.

$$\text{Purity} = (100\% - I_{\text{ORG}}) \times (100\% - I_{\text{VOL}} - I_{\text{NVR}}) \quad \text{Equation 1}$$

I_{ORG} = Organic impurities of related structure, I_{VOL} = volatile impurities, I_{NVR} = non-volatile residue.

The purity value by qNMR was obtained using a combination of the three-proton doublet at 1.33 ppm and the one-proton multiplet at 5.09 ppm measured against a certified internal standard of maleic acid.

Supporting evidence is provided by headspace GC-MS analysis of occluded solvents and elemental microanalysis.

HPLC:	Instrument:	Shimadzu Binary pump LC-20AB, SIL-20 A HT autosampler or Waters Model 1525 Binary pump, 717 plus autosampler
	Column:	X-Bridge C-18, 5.0 μm (4.6 mm x 150 mm)
	Column oven:	32 $^{\circ}\text{C}$
	Mobile Phase:	A = MilliQ water; B = Methanol 0-15 min 40% B; 15-20 min 40-80% B; 20-25 min 80% B; 25-27 min 80-40% B. The aqueous phase was buffered at pH 10.8 using 20mM NH_4OAc and NH_3
	Flow rate:	1 mL/min
	Detector:	Shimadzu SPD-M20A PDA nm or Waters PDA 2998 operating at 310 nm or at 220 nm
	Relative peak area of main component :	
	Initial analysis:	Mean = 99.9%, s = 0.03% (10 sub samples in duplicate, January 2017)
	Re-analysis:	Mean = 99.6%, s = 0.04% (5 sub samples in duplicate, January 2018)
	Re-analysis:	Mean = 100.0%, s = 0.004% (5 sub samples in duplicate, March 2019)
Thermogravimetric analysis:	Volatile content 4.5% and non volatile residue < 0.2% mass fraction (December 2016).	
Karl Fischer analysis:	Moisture content 4.6% mass fraction (December 2016) Moisture content 4.3% mass fraction (December 2017) Moisture content 4.5% mass fraction (January 2019)	
QNMR:	Instrument:	Bruker Avance-III-500
	Field strength:	500 MHz Solvent: acetic acid- d_4 (2.03 ppm)
	Internal standard:	Maleic acid (98.7% mass fraction)
	Initial analysis:	Mean (1.33 ppm) = 95.1%, s = 0.3% (5 sub samples, January 2017)
	Initial analysis:	Mean (5.09 ppm) = 95.1%, s = 0.4% (5 sub samples, January 2017)

Spectroscopic and other characterisation data

ESI-MS:	Instrument:	Micromass Quatro LC Micro
	Operation:	Positive ion mode, direct infusion at 10 µL/min
	Ionisation:	ESI spray voltage at 2.0 kV positive ion
	EM voltage:	650 V
	Cone voltage:	25 V
	Peak:	345.2 (M+H ⁺) <i>m/z</i>
HS-GC-MS:	Instrument:	Agilent 6890/5973/G1888
	Column:	DB-624, 30 m x 0.25 mm I.D. x 1.4 µm
	Program:	50 °C (5 min), 7 °C/min to 120 °C, 15 °C/min to 220 °C (8.3 min)
	Injector:	150 °C Transfer line temp: 280 °C
	Carrier:	Helium, 1.2 mL/min Split ratio: 50/1
	Solvents detected:	None
TLC:	Conditions:	Kieselgel 60F ₂₅₄ . Ethyl acetate/methanol/diethyl amine (10/2/1) Single spot observed, R _f = 0.35. Visualisation with UV at 254 nm
IR:	Instrument:	Bruker Alpha FT-IR
	Range:	4000-400 cm ⁻¹ , neat
	Peaks:	1687, 1515, 1374, 1307, 1275, 1241, 1027, 823, 811, 786, 652 cm ⁻¹
¹ H NMR:	Instrument:	Bruker Avance III 500
	Field strength:	500 MHz Solvent: MeOH- <i>d</i> ₄ (3.31 ppm)
	Spectral data:	δ 1.20 (3H, d, <i>J</i> = 6.5 Hz), 2.67 (1H, dd, <i>J</i> = 9.5, 13.5 Hz), 3.04-3.16 (3H, m), 3.40 (1H, m), 3.77 (3H, s), 4.84 (1H, dd, <i>J</i> = 4.5, 8.5 Hz), 6.69 (1H, s), 6.86-6.89 (3H, m), 7.04 (1H, dd, <i>J</i> = 2.0, 8.0 Hz), 7.13 (2H, d, <i>J</i> = 8.5 Hz), 8.11 (1H, d, <i>J</i> = 2.0 Hz), 8.31 (1H, s) ppm The data reported is for the major rotamer only. Ethanol estimated at 0.08% mass fraction was observed in the ¹ H NMR.
¹³ C NMR:	Instrument:	Bruker Avance III 500
	Field strength:	126 MHz Solvent: MeOH- <i>d</i> ₄ (49.0 ppm)
	Spectral data:	δ 16.1, 40.0, 52.8, 55.7, 56.9, 70.6, 115.2, 116.1, 120.3, 123.8, 126.9, 129.6, 131.4, 133.5, 137.0, 148.5, 160.3, 162.0, 174.1 ppm
Melting point:		147-149 °C
Microanalysis:		Found: C = 60.2%; H = 6.8%; N = 6.7% (November 2016) Calc: C = 62.7%; H = 6.5%; N = 7.0% (Calculated for (C ₁₉ H ₂₄ N ₂ O ₄) ₂ .C ₄ H ₄ O ₄)